


DFNL

Asphere metrology using Diffractive Fizeau Null Lenses

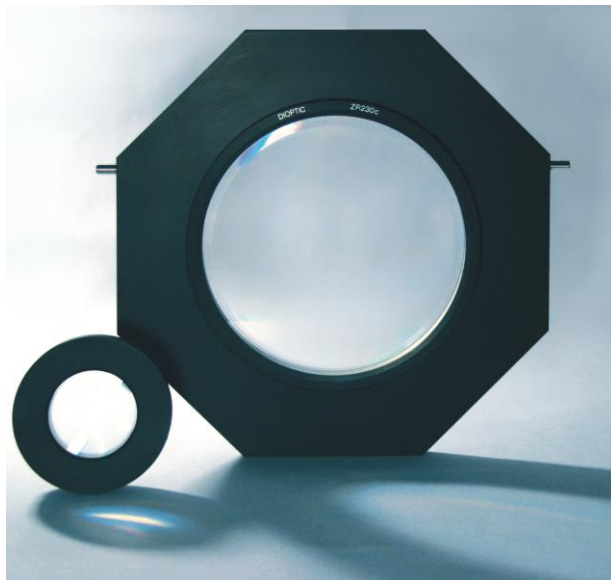

- Easy handling: Measuring aspheres as easy as measuring spheres
- Compatible with standard interferometer bayonet mount
- With integrated Fizeau reference plane
- Measurement of the vertex radius of curvature with integrated cat-eye beam
- Plane surface for recalibration of the Fizeau plane

Size of bayonet mount	2" to 12"
Maximum active area	diameter < 220 mm
Integrated alignment features	Optional: Cat-eye beams
Lowest f-number	f/0.9
Measuring accuracy	< PV $\lambda/20$ ($\lambda/40$ with calibration)

